

ULTIMO HYBRID

THE ULTIMATE EVOLUTION OF WHAT'S POSSIBLE

- **Light Source:**
550W short-arc lamp - 4000hrs life span
- **Output:**
19,000 lm (integrating sphere)
- **Zoom Range:**
2°-29° (beam mode) and 3°-52° (spot mode)
- **Shield Family:**
Moving head fixture suitable for outdoors (IP66)
- **CloudIO Ready:**
Fully compatible with CloudIO



Ultimo Hybrid combines a high IP rating and extended lamp life in a **compact, lightweight** fixture packed with innovative features. Offering **impressive brightness**, a **wide zoom range**, and a **versatile effects engine**, it allows lighting designers to push creative boundaries and craft remarkable visual experiences. Ultimo Hybrid excels in versatility, seamlessly transitioning between **beam, spot, wash, and profile** functions. By integrating multiple functions in one fixture, it reduces the need for extra units, saving venue space and lowering setup costs for both indoor and outdoor applications. As part of the **Shield Family**, it's built for tough conditions, with an **IP66 rating** for water and dust resistance.

Powered by an advanced **550W short-arc lamp**, Ultimo Hybrid offers an impressive **19,000-lumen output** and a lifespan of up to **4,000 hours**, providing reliable performance across countless shows while reducing replacement and energy costs, making it the go-to solution for low maintenance applications.

Its **motorized linear zoom** smoothly delivers precise coverage in both projection modes, from tightly focused beams to evenly collimated spots. It offers a zoom range of **2° to 29° in beam mode** and **3° to 52° in spot mode**, allowing for the creation of dynamic scenes that captivate and engage audiences, perfect for even the most demanding market need. No current technology, whether LED or laser, can match these capabilities, making Ultimo Hybrid **the ultimate all-in-one choice**. Despite its **compact size**, the

fixture boasts a **160mm (6.3 inch) front lens** and **high-quality optics**, ensuring sharp images and collimated beams without compromise.

One of the standout features of Ultimo Hybrid is its **advanced four-focal plane shutter system**, which provides lighting professionals with **precise control**, enabling new opportunities of creativity and content creation. This high level of framing accuracy allows designers to shape beams and create custom effects, like a **"Total Curtain"**





ULTIMO HYBRID

THE ULTIMATE EVOLUTION
OF WHAT'S POSSIBLE

effect, while maintaining sharp edge definition. Additionally, Ultimo Hybrid incorporates the **Absolute Position** innovation, a proprietary system that **remembers the fixture's exact position in real-time without requiring a reset**, even after power interruptions. This innovation guarantees **precise and consistent re-positioning and refocusing**, significantly reducing setup time.


Ultimo Hybrid combines the power of larger luminaires in a **lightweight, compact design** without compromising on features, making it an **all-in-one solution** for various lighting needs. It comes equipped with a **rotating gobo wheel** featuring **eight HD gobos**, a **static gobo wheel**, **four- and eight-facet rotating prisms**, and **linear frost** for wash effects. With its broad color spectrum and **high CRI**, the **CMY mixing system**, **linear CTO**, and **color wheel with 14 dichroic chips**

- including a striking **deep red** - deliver vibrant, professional-grade hues that tell stories without words.

Ultimo Hybrid is a **revolutionary fixture** that transforms hybrid lighting. This innovative powerhouse **combines impressive output with advanced features**, allowing it to adapt to

diverse lighting needs while producing stunning visual effects. It's an invaluable tool for lighting designers in **touring, live shows, permanent installations**, and beyond.

In a world where every beam tells a story, **Ultimo Hybrid is here to help you create yours.**

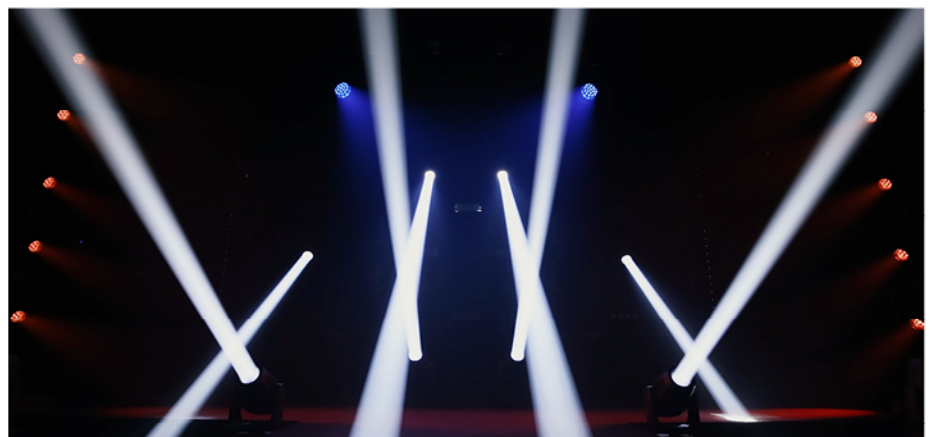

ULTIMO HYBRID

MAIN FEATURES

- Light source: 550W short-arc lamp - 4000hrs life span
- CRI: 80+
- Output: 19,000 lm (in integrating sphere)
- 160-millimeter (6.3 in) diameter front lens
- 2°-29° (beam mode) and 3°-52° (spot mode) linear motorized zoom
- Linear CMY color mixing (Deep Red)
- Linear CTO
- 14-color wheel on a separate channel
- Rotating gobo wheel with 8 interchangeable HD gobos
- Static gobo wheel with 18 static gobos
- Six beam reducers (down to 0.5°)
- 2 prisms (4 and 8 facet) with bi-directional rotation
- Motorized iris
- Framing system: 4 focal planes, +/-60° rotation and macro channel control
- Linear frost 2° and 5°
- Dimmer and stop/strobe
- Absolute Position for precise re-positioning and refocusing
- Control protocols: DMX, Art-Net, RDM, sACN
- Personalities: single mode
- CloudIO Ready
- Operating voltage: 100-240V, 50/60 Hz
- Max power consumption: 750VA
- Weight: 40 kg (88.2 lbs)
- Size (LxWxH): 450 x 320 x 780 mm (17.7 x 12.6 x 30.7 in)

